


PAGEL[®]

SPEZIAL-BETON

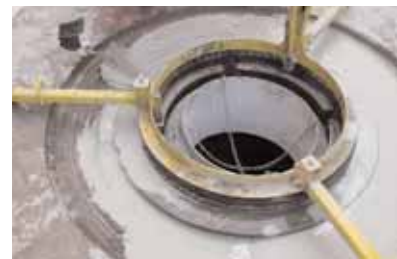

PAGEL[®] V B
RAPID SET GROUT

PAGEL[®] V T
TURBO GROUT

MANHOLE REPAIRING



PLEASE FIND THE LATEST LEAFLET ISSUES ON THE INTERNET AT
WWW.PAGEL.COM

PAGEL-EXTREMELY FAST SETTING GROUT

load bearing after 30 minutes (20 °C)
 extremely high early strength
 flowable and usable for boxing up
 non-shrink
 water resistant
 resistant to frost and dew salt
 V B 1 0 : working time app. 10 min.
 V T 1 0 : working time app. 3 min.

manhole cover grouting
 drain covers
 pipe channels
 installation works
 columns and prefabricated members

	Grain size mm	Grouting height mm	Compressive strength N/mm ²				Bending strength N/mm ²				Expan- sion Vol. %	Aplication time min (20 °C)	Consump- tion kg/m ³
			0,5 h	1 h	1 d	28 d	0,5 h	1 h	1 d	28 d			
VB 10	0 – 1	10 – 50	≥ 5	≥ 8	≥ 35	≥ 60	–	–	–	–	+ 0.4	–	1900
VB 40	0 – 4	30 – 60	≥ 5	≥ 8	≥ 35	≥ 60	–	–	–	–	+ 0.4	–	1900
VB-P 10 (plastic)	0 – 1	10 – 50	≥ 5	≥ 8	≥ 35	≥ 55	–	–	–	–	+ 0.4	–	1800
VT 05	0 – 0.5	10 – 30	≥ 5	≥ 8	≥ 25	≥ 55	≥ 2	≥ 2	≥ 4	≥ 8	–	app. 5	1900
VT 10	0 – 1	10 – 50	≥ 5	≥ 8	≥ 45	≥ 70	≥ 2	≥ 2	≥ 5	≥ 8	–	app. 3	1900
VT-P 05 (plastic)	0 – 0.5	5 – 30	≥ 5	≥ 6	≥ 35	≥ 55	≥ 2	≥ 2	≥ 4	≥ 8	–	app. 3	1900

All test data are guide values, proofed in our German manufacturing plants, - values from other manufacturing plants may vary.

